



## 广东丰亿科技有限公司

GUANGDONG FENGYI TECHNOLOGY CO.,LTD

☎电话: +86-18512616791    +86-18666308858

✉邮箱: Fengyitech@outlook.com

🌐网址: www.fengyitech.com

📍地址: 广东梅州丰顺生态工业区 5-12 栋楼

ADD: GUANGDONG MEIZHOU CITY FENGSHUN, ECOLOGICAL  
INDUSTRIAL ZONE, K06-A, 5-12 DOOR

质量第一，信誉至上，诚信为本，互利共赢

INTEGRITY AND QUALITY

## 广东丰亿科技有限公司

GUANGDONG FENGYI TECHNOLOGY CO.,LTD

# 丰亿概况

ABOUT FENG YI

广东丰亿科技有限公司 位于梅州市丰顺县，拥有多栋厂房，占地面积20亩，厂房建筑面积2万多平方米，是一家专业生产液压铰链，普通铰链，不锈钢铰链，滑轨，合页等家具五金配件的知名大型专业厂家。

本公司技术力量雄厚，拥有40台大型高性能精机冲床，20条自动生产组装线，已实现从原材料加工到成品组装，包装，销售一条龙生产服务。公司拥有专业严格的质量管理团队及先进的生产线，为客户确保每一个产品的质量完美。

丰亿公司的宗旨是“质量第一，信誉至上，诚信为本，互利双赢，”完美品质，成就丰亿。竭诚欢迎广大客商前来交流合作，共创美好未来。



Guangdong Fengyi Technology Co., Ltd. is located in Fengshun County, Meizhou City. The company possesses multiple factory buildings, covering a land area of 20 acres, with a total factory building area of over 20,000 square meters.

It is a renowned large-scale professional manufacturer specializing in hydraulic hinges, standard hinges, stainless steel hinges, slides, hinges, and other furniture hardware accessories. The company boasts strong technical capabilities, equipped with 40 large high-performance precision presses and 20 automatic production and assembly lines.

We have achieved a comprehensive one-stop production service from raw material processing to finished hinge assembly, packaging, and sales.

Our company has a professional and rigorous quality management team along with advanced production lines, ensuring the impeccable quality of every product for our customers.

Fengyi's motto is "Quality first, reputation paramount, integrity as the foundation, mutual benefit and win-win," aiming to achieve excellence through perfect quality, thereby establishing Fengyi's success.

We sincerely welcome extensive business partners to come forward for exchanges and cooperation, jointly creating a bright future.

PAGE

## PAGE OF CONTENTS

### 共赢 / 质量 / 诚信 / 未来

公司拥有严格的质量管理体系和专业的服务团队。所有生产线均采用全自动和半自动装配机，效率高，质量稳定，为客户保证每一件产品的完美品质。  
企业的宗旨是：“质量第一，信誉至上，诚信为本，互利共赢”。

|      |  |    |
|------|--|----|
| PAGE | 型号FY-261铰链   | 01 |
| PAGE | 型号FY-261/ FY-261AS铰链                                       | 02 |
| PAGE | 型号FY-267A/FY-268铰链   | 03 |
| PAGE | 型号FY-269/FY-269A铰链   | 04 |
| PAGE | 型号FY-118A/FY-118B铰链  | 05 |
| PAGE | 型号FY-601/FY-661铰链  | 06 |
| PAGE | 型号FY-661A/FY-661B铰链  | 07 |
| PAGE | 型号FY-663A/FY-668A铰链  | 08 |
| PAGE | 型号FY-668B铰链  | 09 |
| PAGE | 三折钢珠滑轨 3-Fold Ball Bearing Slide (30mm、35mm)               | 10 |
| PAGE | 三折钢珠滑轨 3-Fold Ball Bearing Slide (40mm、42mm、45mm)          | 11 |
| PAGE | 4512-R 海蒂斯款三折钢珠滑轨 4512-R 3-Fold Hettich Ball Bearing Slide | 12 |
| PAGE | 4512S 不锈钢三折钢珠滑轨 4512S S.S. 3-Fold Ball Bearing Slide       | 13 |
| PAGE | 长合页系列 PIANO HINGE  | 14 |
| PAGE | 不锈钢合页 S.S. Door Hinge                                      | 15 |
| PAGE | 不锈钢合页 S.S. Door Hinge                                      | 16 |
| PAGE | 焊头合页 Welding Hinge   | 17 |
| PAGE | 子母合页 Sub-Mother Hinge                                      | 18 |

# 丰亿铰链 FENGYI HINGE



## ① 柔韧性好 Good flexibility

选择精品铰链，注意铰链弹簧复位性要好，可将铰链打开 105 度，用手将铰链两边用力按压，观察支撑弹簧片不变形、不折断、十分坚固的为高质量产品。

Selecting high-quality good hinge, attention must be paid on the hinge's spring reset performance, hinge with high quality its chain can be opened to 105 degrees, with the hand pushing hardly on both sides, we can observe the spring leaf deformation, it's unbroken and very strong

## ③ 舒适无声 Comfort and silence

独特的闭合功能，满足舒适型和功能性的最高要求，只需轻轻一碰，立刻轻柔无声地关合。

Unique closing function, meets the highest demand of comfort and functionality, with gently touch silence stabilization will show soft closing immediately

## ② 耐磨防锈 Wearing-resisting rust

铰链经过对材料的挑选，加工，对其耐磨度，硬度，防锈能力进行严格的测试后，使其拥有镀层厚而富光泽，不易生锈的特点。外表光鲜。绽放闪亮光彩。

Hinge has been the selection of material, processing, and make rigorous testing for its wear-resistance, hardness, anti-rust capacity, so it has excellence of thick-plating, shiny surface.

## ④ 安装简易 Install easily

简洁和谐的曲线，贯穿铰杯，装饰盖和铰杯底座，造型精美时尚，安装调节简单易方便。

Concise and harmonious curve throughout the hinge cup, cap and plate. It builds a exquisite fashion, easy installation and easy adjustment.

## 型号：FY-261

自卸门柜液压铰链 Clip-on Hydraulic Hinge for Cabinet



直臂  
Full overlay



中弯  
Half overlay



大弯  
Inset

- 材料：铁
- 开启角度：105度-110度
- 关闭角度：85度-87度
- 铰杯深度：11.5毫米
- 孔杯距：48毫米/52毫米
- 铰杯直径：35毫米
- 面板厚度：3-7毫米
- 侧板厚度：12-20毫米

Material: Iron  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm

可选底片/Choose Plate



■ 四孔底片 Four Hole Plate

液压管/Hydraulic Pump



## 型号：FY-261

一段力普通铰链 Normal One Way Hinge



直臂  
Full overlay



中弯  
Half overlay



大弯  
Inset

- 材料：铁
- 开启角度：105度-110度
- 关闭角度：85度-87度
- 铰杯深度：11.5毫米
- 孔杯距：48毫米/52毫米
- 铰杯直径：35毫米
- 面板厚度：3-7毫米
- 侧板厚度：12-20毫米

Material: Iron  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



## 型号: FY-261

二段力铰链 Two Way Hinge



直臂  
Full overlay

中弯  
Half overlay

大弯  
Inset

- 材料: 铁
  - 开启角度: 105度-110度
  - 关闭角度: 85度-87度
  - 铰杯深度: 11.5毫米
  - 孔杯距: 48毫米/52毫米
  - 铰杯直径: 35毫米
  - 面板厚度: 3-7毫米
  - 侧板厚度: 12-20毫米
- Material: Iron  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



## 型号: FY-267A

自卸液压缓冲铰链 Clip-on Soft Closing Hinge



直臂  
Full overlay

中弯 (铁尾扣)  
Half overlay  
(Iron clip-on part)

大弯  
Inset

- 材料: 铁
  - 开启角度: 105度-110度
  - 关闭角度: 85度-87度
  - 铰杯深度: 11.5毫米
  - 孔杯距: 48毫米/52毫米
  - 铰杯直径: 35毫米
  - 面板厚度: 3-7毫米
  - 侧板厚度: 12-20毫米
- Material: Iron  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm

可选底片/Choose Plate



■ 飞机型底片 Plane Shape Plate

可选尾扣部分/  
Clip On Part Choose



铁小鸟扣  
metal

锌合金小鸟扣  
Zinc Alloy

## 型号: FY-261AS

深杯液压铰链 Deep Cup Hydraulic Hinge



直臂  
Full overlay

中弯  
Half overlay

大弯  
Inset

- 材料: 铁
  - 开启角度: 105度-110度
  - 关闭角度: 85度-87度
  - 铰杯深度: 11.5毫米
  - 孔杯距: 48毫米/52毫米
  - 铰杯直径: 35毫米
  - 面板厚度: 3-7毫米
  - 侧板厚度: 12-20毫米
- Material: Iron  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm

液压管配件/Hydraulic finishing types



镀镍 (nickel plating) 镀铜 (copper plating)

## 型号: FY-268

固定式液压铰链 Slide-on Hydraulic Hinge



直臂  
Full overlay

中弯  
Half overlay

大弯  
Inset

- 材料: 铁
  - 开启角度: 105度-110度
  - 关闭角度: 85度-87度
  - 铰杯深度: 11.5毫米
  - 孔杯距: 48毫米/52毫米
  - 铰杯直径: 35毫米
  - 面板厚度: 3-7毫米
  - 侧板厚度: 12-20毫米
- Material: Iron  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm

可选底片/Choose Plate



■ 四孔底片 Four Hole Plate

液压管/Hydraulic Pump



## 型号: FY-269

自卸式液压铰链Clip-on Hydraulic Hinge



直臂  
Full overlay



中弯  
Half overlay

- 材料: 铁
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Iron  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



## 型号: FY-118A

不锈钢自卸式液压铰链Stainless Steel Clip-on Hydraulic Hinge



直臂  
Full overlay



- 材料: 不锈钢
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Stainless Steel  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



## 型号: FY-269A

自卸式液压铰链Clip-on Hydraulic Hinge



直臂  
Full overlay



中弯  
Half overlay



大弯  
Inset

- 材料: 铁
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Iron  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



## 型号: FY-118B

不锈钢固定式液压铰链 Stainless Steel Slide-on Hydraulic Hinge



中弯  
Half overlay



- 材料: 不锈钢
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Stainless Steel  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



## 型号: FY-601

自卸式不锈钢铰链 Clip-on Stainless Steel Hydraulic Hinge



直臂  
Full overlay

中弯  
Half overlay

大弯  
Inset

- 材料: 铁
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Iron  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



■ PVC塑料胶垫 PVC plastic cushion

## 型号: FY-661A

自卸式不锈钢液压铰链 Clip-on Stainless Steel Hydraulic Hinge



直臂  
Full overlay

中弯  
Half overlay

大弯  
Inset

- 材料: 不锈钢
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Stainless Steel  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm

可选底片/Choose Plate



■ 四孔底片 Four Hole Plate

液压管/Hydraulic Pump



## 型号: FY-661

自卸式不锈钢液压铰链 Clip-on Stainless Steel Hydraulic Hinge



直臂  
Full overlay

- 材料: 不锈钢
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Stainless Steel  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm

可选底片/Choose Plate



■ 四孔底片 Four Hole Plate

液压管/Hydraulic Pump



## 型号: FY-662A

固定式不锈钢液压铰链 Slide-on Stainless Steel Hydraulic Hinge



直臂  
Full overlay

中弯  
Half overlay

大弯  
Inset

- 材料: 不锈钢
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Stainless Steel  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm

可选底片/Choose Plate



■ 四孔底片 Four Hole Plate

液压管/Hydraulic Pump



## 型号: FY-663A

自卸式不锈钢液压铰链Clip-on Stainless Steel Hydraulic Hinge



直臂  
Full overlay



中弯  
Half overlay



大弯  
Inset

- 材料: 不锈钢
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Stainless Steel  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



## 型号: FY-668B

固定式不锈钢液压铰链Slide-on Stainless Steel Hydraulic Hinge



直臂  
Full overlay



中弯  
Half overlay



大弯  
Inset

- 材料: 不锈钢
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Stainless Steel  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



## 型号: FY-668A

自卸式不锈钢液压铰链Clip-on Stainless Steel Hydraulic Hinge



直臂  
Full overlay



中弯  
Half overlay



大弯  
Inset

- 材料: 不锈钢
- 开启角度: 105度-110度
- 关闭角度: 85度-87度
- 铰杯深度: 11.5毫米
- 孔杯距: 48毫米/52毫米
- 铰杯直径: 35毫米
- 面板厚度: 3-7毫米
- 侧板厚度: 12-20毫米

Material: Stainless Steel  
Angle of opening 105°-110°  
Angle of Closing 85°-87°  
Depth of hinge CUP 11.5  
Cup hole distance 48mm/52mm  
Diameter of hinge cup 35mm  
Dimension of door 3-7mm  
Side plate thickness 12-20mm



# 丰亿导轨 FENGYI SLIDE

## ① 消声静音 Silent

坚固耐用，具有高刚性、高强度、低噪音，不易生锈等优秀特点，给您带来流畅的滑动性，给家居带来无可挑剔的完美呈现。

MingQi Slide has the outstanding feature of stability & durability, with high-rigidity, high strength, good noise prevention & rust prevention. The Excellent smooth sliding bring impeccable perfection to your home.

## ② 防脱装置 Prevent accidental device

防脱装置，防止意外脱离，缓冲防撞的装置，抽屉不会脱轨，防开启设置，抽屉关闭后不会自动开启。

Device for preventing detachment buffer collision, it has the settings to ensure the drawer will not derail open, while the drawer closing it will not automatically unlock.

## ③ 优质钢珠 High quality steel ball

采用优质材料精制，并有效防止腐蚀及生锈，采用优质钢珠固定结构，保证了侧稳定性。

high-class material assured effective prevention of corrosion and rust. steel ball fixed structure ensure the lateral stability.

## ④ 卓越的超承重量 superior load capacity

三节轨全伸展导轨最大利用抽屉空间，外轨加厚压铸增加滑轨的承重量。

3 fold full extension slide to achieve the maximum use of drawer space, thickened outside rail & pressure casting improve the load capacity of slide.

## 三折钢珠滑轨 3-Fold Ball Bearing Slide



| 型号Model | 宽度Width | 厚度Thickness       |
|---------|---------|-------------------|
| 3007    | 30mm    | 0.7mmx0.7mmx0.7mm |
| 3510A   | 35mm    | 1.0mmx1.0mmx1.0mm |
| 3510B   | 35mm    | 0.9mmx0.9mmx0.9mm |
| 3510C   | 35mm    | 0.8mmx0.8mmx0.8mm |

规格: 10"-26"

产品宽度: 30mm、35mm

建议用途: 中承载的活动柜，柜台抽屉，一般家具或任何需要45公斤以下的承载，要求全展的用途。

产品特点: 安装时可微调间隙，快速分离机构。  
避震珠条吸收冲撞，防止抽屉弹出机构

安装方式: 侧面安装。12.7±0.2mm

表面处理: 镀锌，彩锌，黑锌。

材料: 冷轧钢板

Size: 10"-26"

Width: 30mm、35mm

Recommended applications: mid-duty movable cabinet, desk drawer, ordinary furniture, or any applications requiring 45kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing; quick separation mechanism; vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installing method: side installation. 12.7±0.2mm

Finishing: white zinc-plated, color zinc-plate, black zinc-plated.

Material: cool-rolled steel plate

## 三折钢珠滑轨 3-Fold Ball Bearing Slide



| 型号Model | 宽度Width | 厚度Thickness       |
|---------|---------|-------------------|
| 4010A   | 40mm    | 0.8mmx0.8mmx0.8mm |
| 4010B   | 40mm    | 0.7mmx0.7mmx0.7mm |
| 4210A   | 42mm    | 1.0mmx1.0mmx1.0mm |
| 4210B   | 42mm    | 0.9mmx0.9mmx1.0mm |
| 4210C   | 42mm    | 0.9mmx0.9mmx0.9mm |
| 4210D   | 42mm    | 0.8mmx0.8mmx0.8mm |
| 4512A   | 45mm    | 1.2mmx1.2mmx1.5mm |
| 4512B   | 45mm    | 1.2mmx1.2mmx1.2mm |
| 4512C   | 45mm    | 1.0mmx1.0mmx1.2mm |
| 4512D   | 45mm    | 1.0mmx1.0mmx1.0mm |
| 4512E   | 45mm    | 0.9mmx0.9mmx1.0mm |

规格: 10"-26"

产品宽度: 40mm、42mm、45mm

建议用途: 中承载的活动柜, 柜台抽屉, 一般家具或任何需要45公斤以下的承载, 要求全展的用途。

产品特点: 安装时可微调间隙, 快速分离机构。  
避震珠条吸收冲撞, 防止抽屉弹出机构

安装方式: 侧面安装。12.7±0.2mm

表面处理: 镀锌, 彩锌, 黑锌。

材料: 冷轧钢板

Size: 10"-26"

Width: 40mm、42mm、45mm

Recommended applications: mid-duty movable cabinet, desk drawer, ordinary furniture, or any applications requiring 45kg load or less and requiring full extension.


Product features: fine adjustment of gap is possible when installing; quick separation mechanism; vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installing method: side installation. 12.7±0.2mm

Finishing: white zinc-plated, color zinc-plate, black zinc-plated.

Material: cool-rolled steel plate

## 4512-R海蒂斯款三折钢珠滑轨 4512-R 3-Fold Hettich Ball Bearing Slide

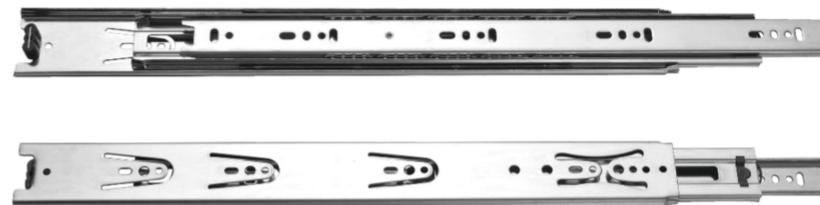

规格: 10"-26"

产品宽度: 40mm、42mm、45mm

产品厚度: 1.2mmx1.2mmx1.5mm

建议用途: 中承载的活动柜, 柜台抽屉, 一般家具或任何需要45公斤以下的承载, 要求全展的用途。

产品特点: 安装时可微调间隙, 快速分离机构。  
避震珠条吸收冲撞, 防止抽屉弹出机构

安装方式: 侧面安装。12.7±0.2mm

表面处理: 镀锌, 彩锌, 黑锌。

材料: 冷轧钢板

Size: 10"-26"

Width: 40mm、42mm、45mm

Thickness: 1.2mmx1.2mmx1.5mm

Recommended applications: mid-duty movable cabinet, desk drawer, ordinary furniture, or any applications requiring 45kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing; quick separation mechanism; vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installing method: side installation. 12.7±0.2mm

Finishing: white zinc-plated, color zinc-plate, black zinc-plated.

Material: cool-rolled steel plate

广东丰亿科技有限公司

GUANGDONG FENGYI TECHNOLOGY CO.,LTD

## 4512S不锈钢三折钢珠滑轨 4512S S.S. 3-Fold Ball Bearing Slide



规格: 10"-26"

产品宽度: 45mm

产品厚度: 1.0mmx1.0mmx1.0mm

建议用途: 中承载的活动柜, 柜台抽屉, 一般家具或任何需要45公斤以下的承载, 要求全展的用途。

产品特点: 安装时可微调间隙, 快速分离机构。  
避震珠条吸收冲撞, 防止抽屉弹出机构

安装方式: 侧面安装, 12.7±0.2mm

表面处理: 镀锌, 彩锌, 黑锌。

材料: 冷轧钢板

Size: 10"-26"

Width: 45mm

Thickness: 1.0mmx1.0mmx1.0mm

Recommended applications: mid-duty movable cabinet, desk drawer, ordinary furniture, or any applications requiring 45kg load or less and requiring full extension.

Product features: fine adjustment of gap is possible when installing; quick separation mechanism; vibration prevention ball strip for absorbing impulsive force, and mechanism to prevent drawer from springing out.

Installing method: side installation, 12.7±0.2mm

Finishing: white zinc-plated, color zinc-plate, black zinc-plated.

Material: cool-rolled steel plate

## 供选择 For Your Choice



两珠 / 2 Balls



三珠 / 3 Balls




四珠 / 4 Balls



六珠 / 6 Balls



橡胶 / Big rubber



压花 / Dotted



黑色 / Black



镀锌 / Zinc



镀彩锌 / Color Zinc



Small rubber

## 丰亿排铰 FENGYI PIANO HINGE



### 长合页 Piano hinge

材质: 不锈钢

供选择厚度: 0.6/0.8/1.0/1.2/1.5mm

每寸宽度: 1.0"1.2"1.5"2.0"2.5"3.5"

Material: Stainless Steel

Thickness for choice: 0.6/0.8/1.0/1.2/1.5mm

Width (inch) : 1.0"1.2"1.5"2.0"2.5"3.5"

### ① 精密轴承 Precision bearing

不锈钢合页采用优质不锈钢精制而成, 该材料经抛光、拉丝后不需要经过电镀处理, 而且不会生锈, 不变形、硬度高。合页采用进口精密轴承, 间隙小。

Stainless steel hinge is made of high quality stainless steel refined but become, polishing, pull the materials After we don't need through electroplating processing and will not rust deformation, hard degree is high, the hinge of imported precision bearing, small gap.

### ② 精钢打造 Stainless steel building

数控中心自动化生产线制造, 高制造精度, 降低合页部件间隙, 精刚打造, 耐腐蚀性能优越, 长时间使用不产生腐蚀和生锈。

CNC center automation production line, high manufacturing accuracy, reduce the hinges parts clearance, stainless steel corrosion resistance is superior, the long time to make with no corrosion and rust.

### ③ 优质钢球 High quality steel ball

滚珠与轴承紧密相连, 轴承与页片间隙度小, 有效保障了开门顺畅和灵活静音; 受力面积大, 借助开槽口的托力和开槽面的静摩擦力后, 承重性能更强!

Ball closely connect with the bearing, the bearing and small plates clearance degree, the effective guarantee the door is smooth and flexible mute; Stress area is large, with the aid of a lift force and notches slot the static friction force, the bearing performance and stronger!

### ④ 质感细腻 Smooth texture

安装调节简单易方便, 经过涂装、喷涂、打磨、电镀等工艺复杂, 其表面质感细腻, 长时间使用光亮如新。

Easy installation and adjustment easy. After coating, spray, grinding, electricity plating such as complex process, the surface smooth texture, long time use brightness is new.



## 丰亿合页 FENGYI DOOR HINGE

挑选优质材料，做工考究细致，表面光泽度高，硬度高，手感好，采用大开大合的设计，细腻的工艺打磨，将简约与品味完美地融合在一起，尽显完美品质，创造和谐之家。

We choose high-quality materials and pursue carefulness in making. Outside, it has high gloss, high hardness and it is easy to touch. Using fine design and exquisite polishing, the product fuses simple and style greatly together to show its nineness and create a harmless home.



### 不锈钢合页 S.S. Door Hinge



砂光  
Sanding



红古  
Red bronze



青古  
Bronze

### 不锈钢合页 S.S. Door Hinge



铜色  
Copper



砂光  
Sanding



砂光  
Sanding

| 型号 Model No. | 轴承 Bearing | 规格 Dimension(L×W×T) |                       |                   |
|--------------|------------|---------------------|-----------------------|-------------------|
| FY-3020      | 2BB        | 3"×3"×2mm(Φ=10mm)   | 3"×2.5"×2.5mm(Φ=11mm) |                   |
| FY-4030      | 4BB        | 4"×3"×3mm(Φ=14mm)   | 4"×3"×2.5mm(Φ=12.5mm) |                   |
| FY-4030      | 4BB        | 4"×3"×3mm(Φ=13mm)   | 4"×3"×2.5mm(Φ=12mm)   | 4"×3"×2mm(Φ=11mm) |
| FY-5030      | 4BB        | 5"×3"×3mm(Φ=13.5mm) | 5"×3"×2.5mm(Φ=12mm)   |                   |
| FY-6030      | 4BB        | 6"×3"×3mm(Φ=14.2mm) | 6"×3"×3.5mm(Φ=14.2mm) |                   |

广东丰亿科技有限公司

GUANGDONG FENGYI TECHNOLOGY CO.,LTD

## 焊头合页 Welding Hinge



FY-W40焊头合页  
FY-W40 Welding Hinge



FY-W50焊头合页  
FY-W50 Welding Hinge

| 型号 Model No. | 轴承 Bearing | 材料 Material | 规格 Dimension(L×W×T) |             |
|--------------|------------|-------------|---------------------|-------------|
| FY-W40       | 0BB        | S.S.201     | 4"×3"×3mm           | 4"×3"×2.5mm |
| FY-W50       | 0BB        | S.S.201     | 5"×3"×3mm           | 5"×3"×2.5mm |



FY-GB40焊头合页  
FY-GB40 Welding Hinge



FY-GB50焊头合页  
FY-GB50 Welding Hinge

| 型号 Model No. | 轴承 Bearing | 材料 Material | 规格 Dimension(L×W×T) |             |
|--------------|------------|-------------|---------------------|-------------|
| FY-GB40      | 2BB        | S.S.201     | 4"×3"×3mm           | 4"×3"×2.5mm |
| FY-GB50      | 2BB        | S.S.201     | 5"×3"×3mm           | 5"×3"×2.5mm |

## 子母合页 Sub-Mother Hinge



砂光  
Sanding



红古  
Red ancient



铜色  
Copper

| 型号 Model No. | 轴承 Bearing | 材料 Material | 规格 Dimension(L×W×T) |                   |                       |
|--------------|------------|-------------|---------------------|-------------------|-----------------------|
| FY-40SM      | 2BB        | S.S.201     | 4"×3"×3mm(φ=14.2mm) | 4"×3"×3mm(φ=13mm) | 4"×3"×2.5mm(φ=11.8mm) |
| FY-9005      | 1BB        | S.S.201     | 90mm×65mm×2.5mm     |                   |                       |
| FY-9651      | 1BB        | S.S.201     | 90mm×70mm×2.5mm     | 90mm×65mm×2.5mm   | 75mm×60mm×2.5mm       |
| FY-9650      | 1BB        | S.S.201     | 90mm×70mm×2.5mm     | 90mm×65mm×2.5mm   | 75mm×60mm×2.5mm       |

广东丰亿科技有限公司

GUANGDONG FENGYI TECHNOLOGY CO.,LTD